



# Vertical Transporter




SVT-700



Refer carefully to the Manual before using products.



## ■ Coding Principle

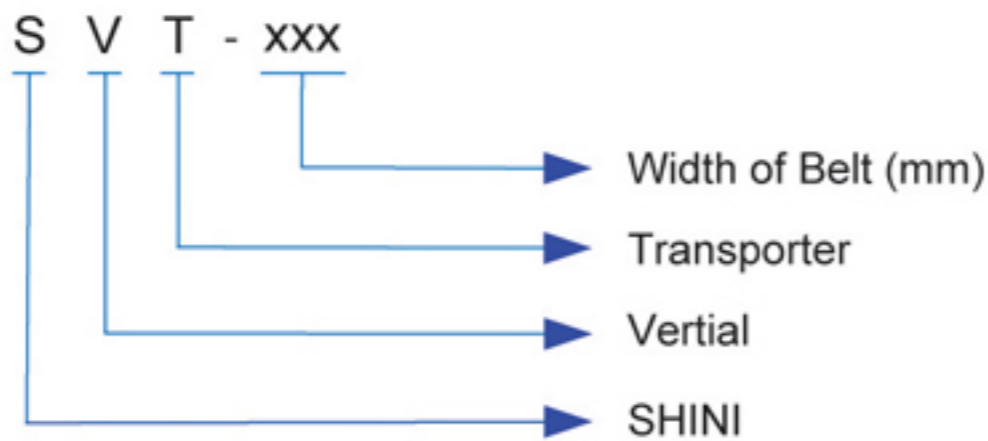

## ■ Features

- Connection with robot signals, precise catch and protection of products.
- When lowered to the position, tilts automatically to side the product to the working table.
- The specially disposed table surface will not leave scratches to the products, nice looking and wearable.
- There is a filter and fast connection is provided to facilitate the operation.
- The vertical stroke can be adjusted according to height of the injection moulding machine and robot.


## ■ Application

The Vertical Transporter of SVT series are used for taking over the products of the robot, enhancing its efficiency and protecting operator's safety. This series can be connected with robot signals, and precise catch and protection of products. There is a filter and fast connection is provided to facilitate the operation. The vertical stroke can be adjusted according to height of the injection moulding machine and robot.



SVT-700 (Lateral)

## Outline Drawings

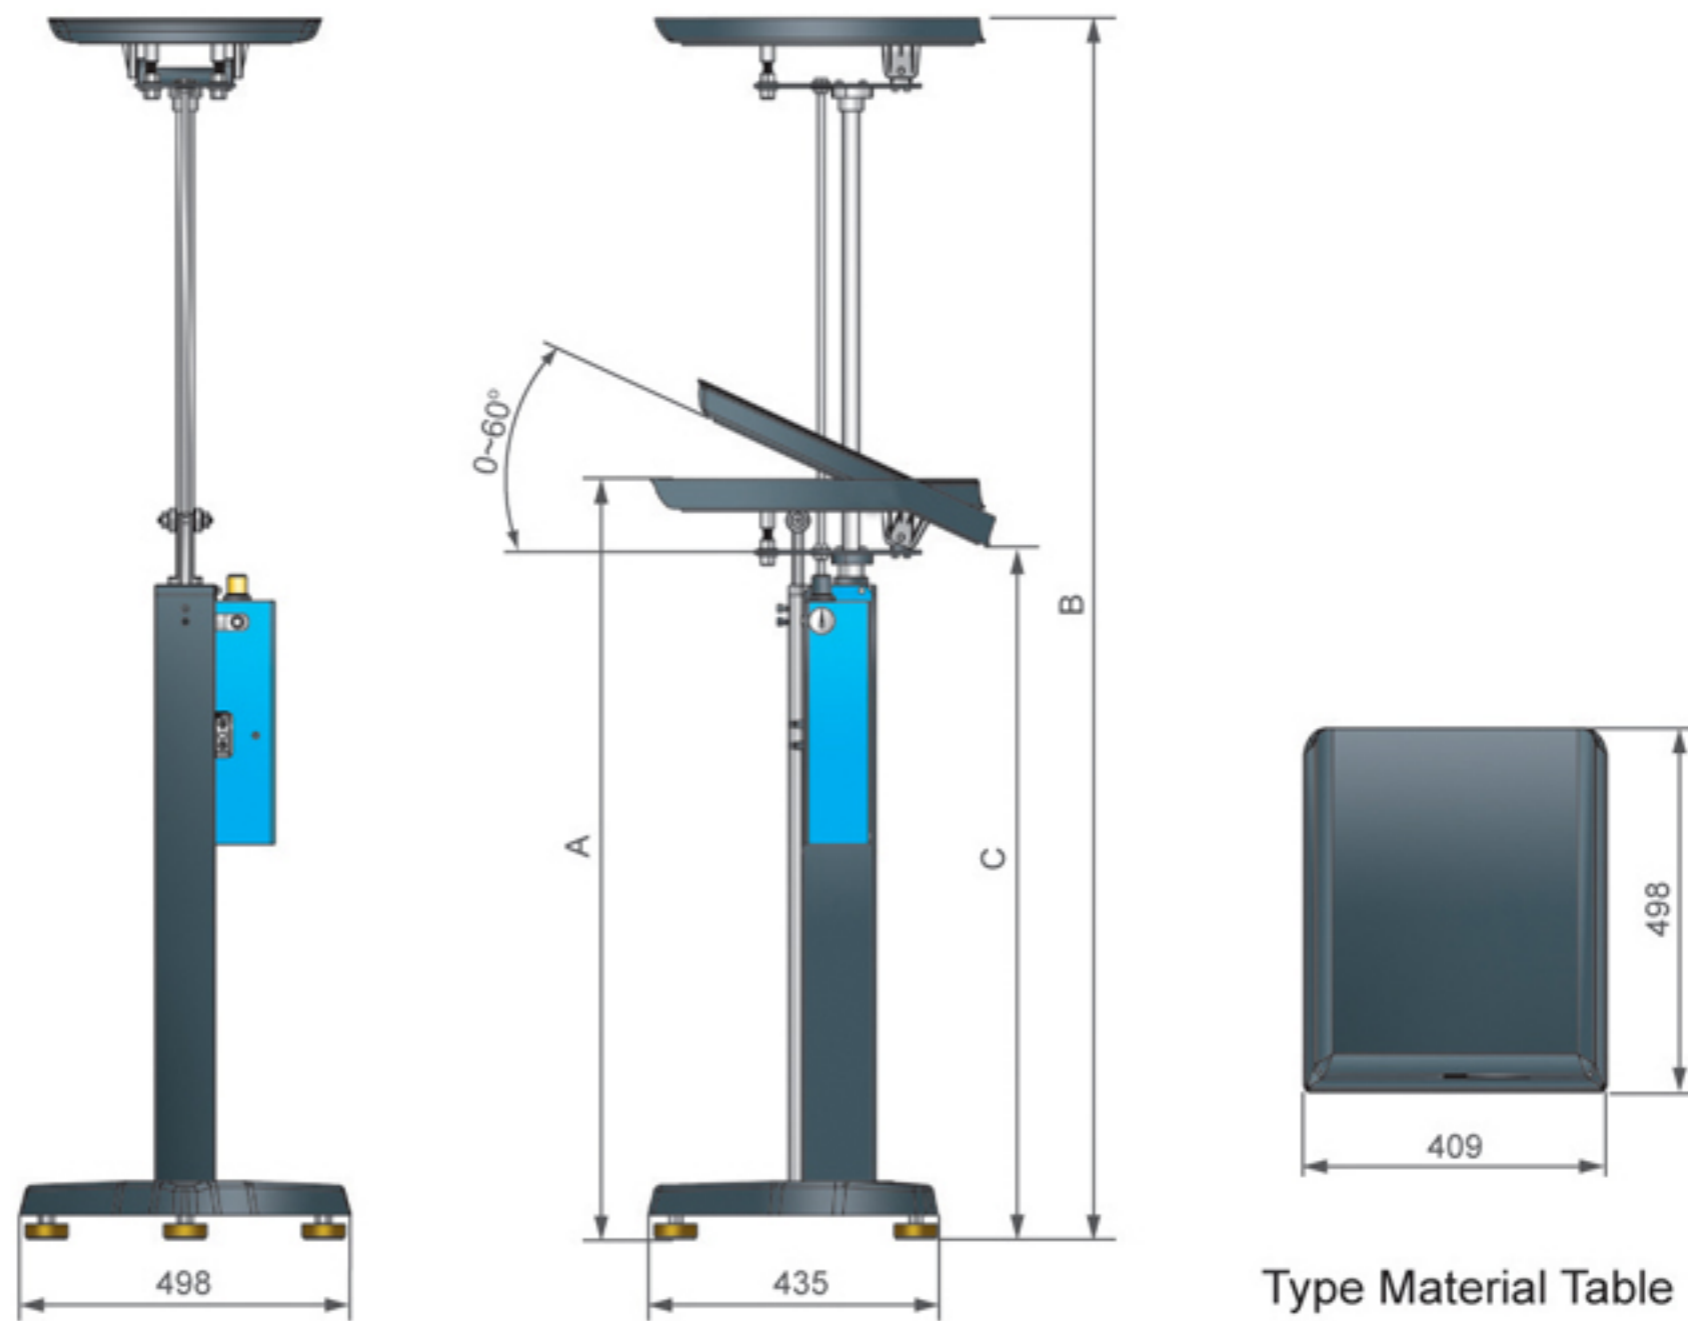

## Specifications

Model	SVT-500	SVT-600	SVT-700	SVT-800
A (mm)	930	1030	1130	1230
B (mm)	1450	1650	1850	2050
C (mm)	804	904	1040	1140
Net Weight (kg)	36	38	40	42
Dimensions (mm) D×W×H	498 × 498 × 930	498 × 498 × 1030	498 × 498 × 1130	498 × 498 × 1230
Power Source (V)	DC 24V			
Air Pressure (bar)	5			
IMM (ton)	50 ~ 250			
Max Load (kg)	2			
Air consumption(Nl/cycle)	0.5			

We reserve the right to change specifications without prior notice.



## SHINI PLASTICS TECHNOLOGIES, INC.

### Headquarters:

Shini Plastics Technologies, Inc.  
No. 23 Minhe St., Shulin City, Taipei, Taiwan  
tel: +886 2 2680 9119  
fax: +886 2 2680 9229  
email: [shini@shini.com](mailto:shini@shini.com)

### Factories:

- Taipei / Taiwan
- Dongguan / China
- Ningbo / China
- Pinghu / China
- Mumbai / India